


JTECH Introduces the Next Generation in Healthcare & Patient Paging... **MEDI PASS!**

- ✓ *Discreet*
- ✓ *Reliable*
- ✓ *Cost-Effective (and much more)*



Simple and Secure
Charging Connection

Clear Numbering on the Face
Simplifies Management

Voice *Out-of-Range* and Search Messages **Minimize Loss**

Ergonomic and Easy to Hold

Vibration, Flash and Voice Alerts Make It **Easy to Use**

Practical Design
Stands or Lays Flat

New **Rapid-Charging** Technology


Attractive, Appropriate and **Soothing** "Blue" Color

Integrated Message Area Clearly Positioned for Every Patient to See
(Customize Your Inserts To Identify the Healthcare Facility or Department)

COMMPASS Paging Technology Provides **Maximum Range**

Reliable & Durable by Design

Intuitive Backlit Pager Number ("Green is Go")




MEDI PASS™ - *Better by Design*

Available Only from **JTECH**
COMMUNICATIONS, INC.

Call 800.321.6221 to Find Out More Today

COMMPASS™ Charger Benefits

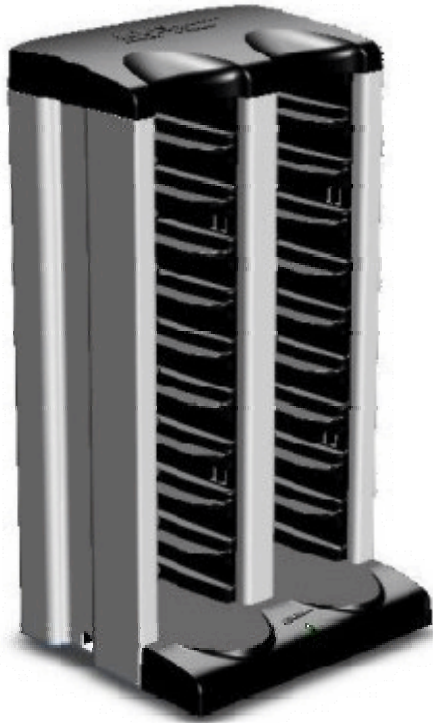

- **Space-Saving** Charger Tower Design Supports up to 20 CommPass Pagers in a Minimum of Space
- Individual Slots Facilitate **FIFO Pager Rotation**, Maximizing Pager Service and Value
- New **Rapid-Charging Technology** Recharges Pagers in 2-3 Hours or Less
- **Tower Charger** Eliminates Pager Stacks Falling Over
- Wall Mounting Option to **Maximize Available Space**
- **Intuitive** Back-Lit Pager ID Visibility Allows for Proper and More Orderly Management of Pagers
- Daisy-Chain up to **3 Chargers** on a Single Power Supply
- Pager Fit is Clean and Snug with Tactile Recognition of Pager Connection and Charging, **Simplifying Usage**
- Charger **Power Indicator** Shows Unit is Operational
- **Robust, High-Tech Design** and Styling Fits Any Décor

COMMPASS Specifications

<u>Item</u>	<u>Specification</u>
Power Supply, Pager	1 Rechargeable – 2 x 2/3 AAA – 280mA NiMH Battery Pack, 2.4V
Transmit/Receive Protocol	POCSAG
Operating Frequencies	COMMPASS is synthesized in UHF bands from 450-470 MHz and readily available on 12 shared-license frequencies with 12.5 KHz splinter channels
Pager Operating Temp. Range	0° C to +50° C
Exterior Dimensions, Pager	5.4" Tall (137.16 mm) x 2.25" Wide (57.15 mm) x .91" Deep (23.11 mm)
Promo Insert Dimension	3.9" Tall (99.06 mm) x 1.3" Wide (33.02 mm) x 0.020" max. Thick (0.508 mm)
Weight, Pager	0.25 lbs. (.1134 kg)
Weight, Charger	6.78 lbs. (3.08 kg) empty; 11.36 lbs. (5.14 kg) full
Exterior Dimensions, Charger	13.0" Tall (325 mm) x 7.0625" Wide (179 mm) x 7.1875" Deep (182 mm)
Power Supply, Charger (std.)	13.5V, 2.4A (supports 1 charger / 20 COMMPASS pagers maximum)
Power Supply, Charger (large)	13.5V, 7.3A (supports up to 3 chargers / 60 COMMPASS pagers maximum)



6413 Congress Avenue, Suite 150, Boca Raton, Florida 33487
 800.321.6221 phone • 561.997.0773 fax • www.jtech.com