

43" A Frame Indoor or Outdoor LCD Display

User Manual




JTECH®

✉ wecare@jtech.com

🌐 www.JTECH.com

☎ 800.321.6221

What's in the Box

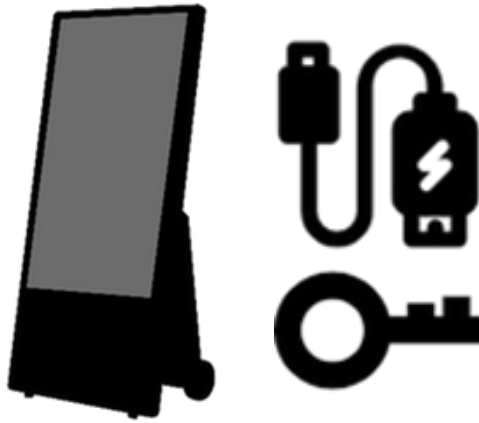

- Outdoor Digital A-Frame Unit with Android and Built-In Battery
- Charger and Power Cord
- Key to Maintenance Door

Unpacking Notice

Before Unpacking




- Please read and fully understand unpacking notice before installation.
- Please check the packaging for any abnormalities, such as creaking, dents, etc.
- Please do necessary inspection before you move the display out of the carton.
- Always have an experienced technician install the display to prevent any damage.

Unpacking



- This product is packed in a carton, together with the standard accessories.
- Any other optional accessories will be packed separately.
- After opening the carton, ensure that the contents are complete and in good condition.
- As this product is high and heavy, the operation of moving the device is recommended to be performed by two technicians.

Details

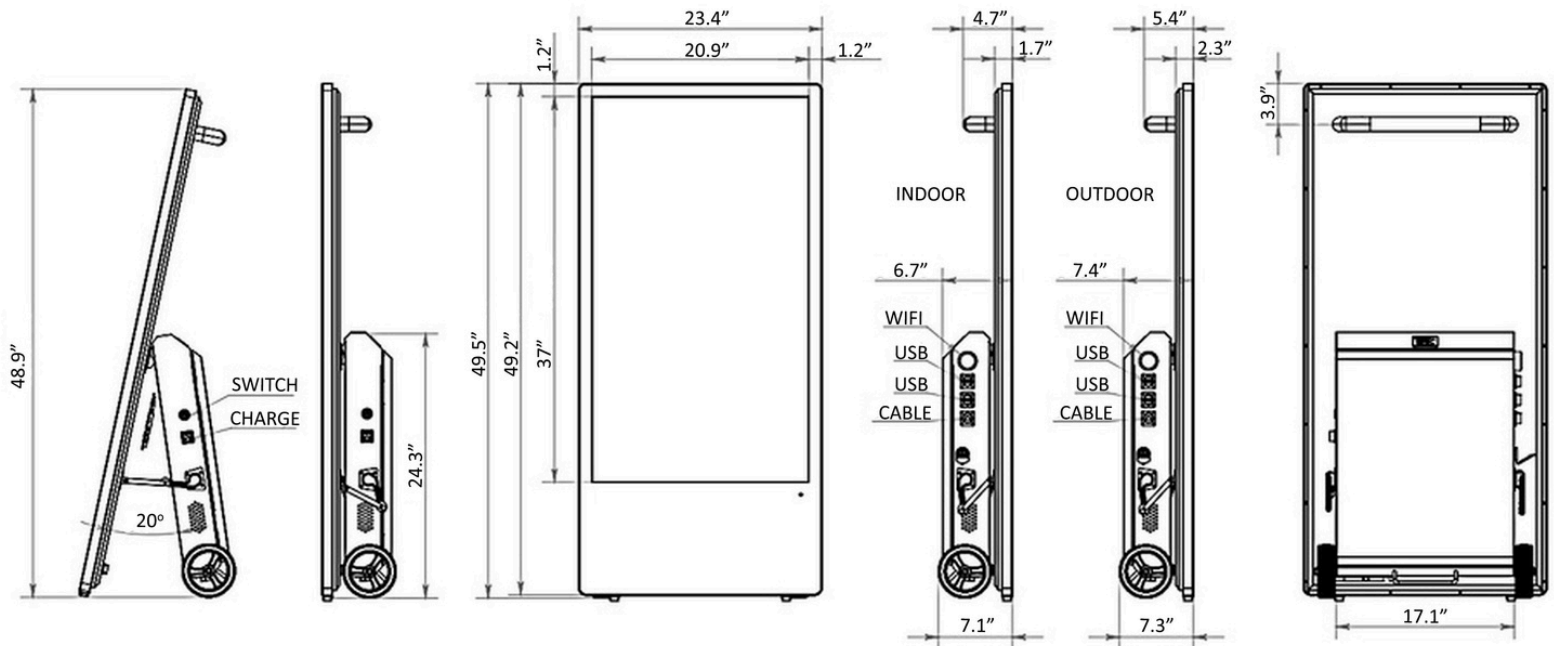

Moving the Display

1

EXPAND THE STAND

- Put the device vertically
- Hold the handle with both hands and unfold the retention bracket to stand



2

RELEASE THE LOCKING BAR TO START MOVING THE UNIT



3

GRASP THE HANDLE AT THE REAR OF THE UNIT AND TILT THE DISPLAY IN A BACKWARD DIRECTION



4

PUSH THE UNIT TO THE INTENDED LOCATION, ENSURING THAT THE BOTTOM PART OF THE SCREEN REMAINS CLEAR OF THE FLOOR



Charging the Battery

This display incorporates an internal rechargeable lithium - polymer battery. At the time of its arrival, the battery will already possess a certain amount of charge. Nevertheless, in order to charge the battery to its full capacity, it is necessary to connect the charger (or the mains power cable) to both the display and the mains socket.



Instructions

- 1 CONNECT THE POWER PLUG TO THE CHARGING UNIT



- 2 CONNECT THE CHARGING UNIT TO THE DISPLAY



- 3 CONNECT THE POWER PLUG TO THE OUTLET



Charging Light Mode



CHARGING MODE




FULLY CHARGED

Charge Level Indicator




THE SMART METER ON THE REAR OF THE DISPLAY

Connect the WiFi

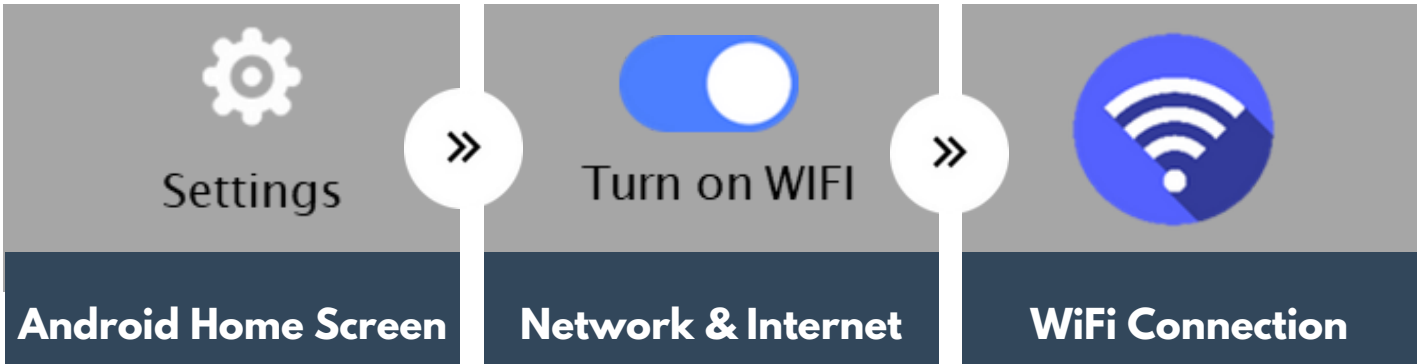

USB Plug & Play

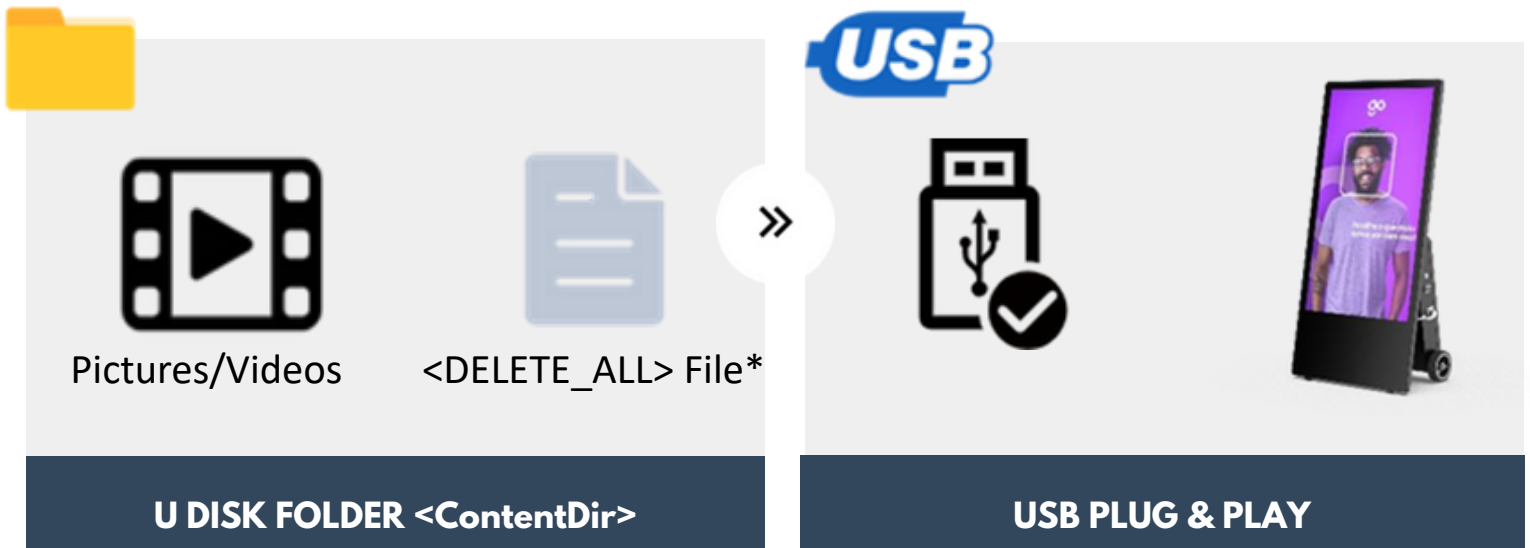

*This file is only required when there is a need to delete old content.

SPECIFICATIONS

Model Number	LSR13001041	LSR13001043
Panel	43inch	43inch
LCD Panel Type Resolution	1920*1080	1920*1080
Backlight	LED	LED
Brightness	1500 nits	2500 nits
Contrast Ratio	1200:1	1200:1
Color Depth	8 bits	8 bits
Response Time	8 ms (typ)	8 ms (typ)
Viewing Angle	178° / 178°	178° / 178°
Light Life Time	50,000 hrs (typ.)	50,000 hrs (typ.)
Power	Charger with power input 110V or 220V, 50 Hz / 60 Hz	
Rechargeable Battery	43.2Ah battery capability	62.4Ah battery capability
Charing time	4.5 hours	8 hours
Power Consumption	<98W	<135W
User Interface		
Language	English / Multi Language option	
Environment		
Operating Temperature	-20°C ~ 60°C	
Storage Temperature	-10°C ~ 60°C	
Humidity	10% ~ 80% RH Non-condensing	
Internal Player		
Processor	ARM Quad-Core Cortex-A55 up to 1.9GHz	
Main memory	2GB DDR3	
Interface Graphics	Mali-G31 GPU	
Storage (FDM) Multimedia	eMMC 16GB(about 2GB occupied by o/s)	
IO ports	265; Encoder: 1080P 100fps H.265/H.264 USB 2.0 x2, RJ45 x 1, HDMI in	
Operating system	Android 9.0	
Network Environment	WLAN 802.11 b/g/n (2.4GHz) ,RJ45	
Certification	CE, FCC&Rohs	
Mechanical Specs		
Orientation	Portrait	
Cabinet Color	Black	
Product Dimension (LxHxD) (Inches)	54.3x11x28.1	
CTN Dimension (LxHxD) (Inches)	49.5x23.4x7.1	49.5x23.4x7.2
Weight (N.W)	95 lb	104 lb
Weight (G.W/ Carton)	106 lb	126 lb



1965 Evergreen Blvd, Suite 300
Duluth GA 30096

wecare@jtech.com

www.JTECH.com

800.321.6221