

Components

- Push Button Transmitter
- Rugged Pagers (PGRGDM/PGRGDS)
- Charging Base (with power supply)



Equipment Setup

Step 1 – Push Button Setup

Place the Push Button Transmitter in a convenient location (Table, Counter) away from heat and humidity. (See Page 2 for more installation information)



Step 2 – Pager Charging Base Setup

Connect charger bases and connector wires if applicable. Plug the power supply into the charging base and then into a standard 110-240v outlet.

Step 3 – Pager Charging Base Setup

Add pagers to the charging base. You will see a BLUE light on each pager. This light indicates the charging status.

- Flashing Blue - Pager is Charging
- Solid Blue - Pager is Fully Charged



System Operation

Placing the Push Button Transmitters:

Place transmitters in any location where they are needed. They can be set on a counter or table or secured using the included double-sided foam adhesive.

When the foam adhesive is properly installed on the bottom of the transmitter, the batteries can still be replaced without removing the adhesive.

System Operation Cont.

Handing out the Pagers:


Give the staff member a pager. Tell the staff member the pager will alert when they are needed. The default page for this system is programmed for the pager to vibrate for 8 seconds. After the pager is finished vibrating it automatically goes back into standby mode waiting for the next page. Hand the pagers out from the charging base (they will “demo” page each time they are removed from the stack), or you can simply store them in a basket and hand them out. A fully charged pager will function all day without being recharged. You can reset a pager by inserting it into the charging base.

Paging the Alpha Pager:

Push Button Transmitters come with 1 or 3 buttons. Press one of the buttons and the page will be sent to the corresponding pager. A red light will display for two seconds indicating a successful page.

Example:

If you push a button on Push Button Transmitter #2, the corresponding pager (shown below) will display a numeric message “2”

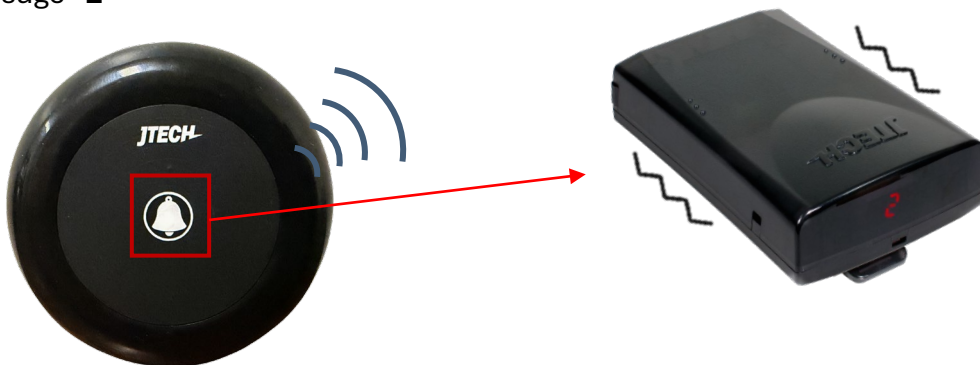

Attaching to a Surface

- Remove the paper backing from one side of the included double-sided foam adhesive.
- Attach the foam adhesive to the back of the push-button transmitter.
- Remove the remaining paper backing from the other side of the foam adhesive.
- Firmly press the transmitter onto the desired table or wall surface.
- [Click for Instructional Video](#)



Optional Holder – Clear or Black (Sold Separately)

- Create 2” x 2” Button Label
- Open Holder – Splits into two halves.
- Place Label using indent guides between the top and bottom.
- Place or adhere button in the space provide.
- Align the top and bottom to enclose label between.
- [Click for Instructional Video](#)